



BRIAN & BARRY BUILDING SANBASTIA

BRIAN & BARRY BUILDING

VHERNIER

VHERNIER

BRIAN & BARRY BUILDING
SANBASTIA

Orilla

Surface Luminaire

Orilla es otro ejemplo más de experiencia en lentes, el nuevo diseño compacto con una capacidad única para mejorar la arquitectura, especialmente diseñado para corredores de interiores y exteriores y elementos de fachada para dar un corte fino con la ayuda de lentes elípticas.

Orilla ahora viene en 4 estilos de salida diferentes para varios diseños montados en superficie y empotrados. Los colores del cuerpo blanco, gris y grafito son opcionales.


La luminaria clasificada como CLASE II o CLASE III con controlador integrado y remoto depende del producto. Temperatura de color 3000K y 4000K, LED CRI > 80 y tiempo de vida 50,000 horas.

Orilla is yet another example of lens expertise , the new compact design with a unique ability to enhance architecture, specially designed for indoor & outdoor corridors and facade elements to give a sharp thin out with the help of elliptical lens .

Orilla is now coming in 4 different output styles for various design surface mounted and recessed . White,Grey and Graphite body colours are optional .

The luminaire rated as CLASS II or CLASS III with integral and remote driver depended on product. Colour temperature 3000K and 4000K, LED CRI >80 and life time 50,000 Hours.

Tricky Design
Sleek & Customizable

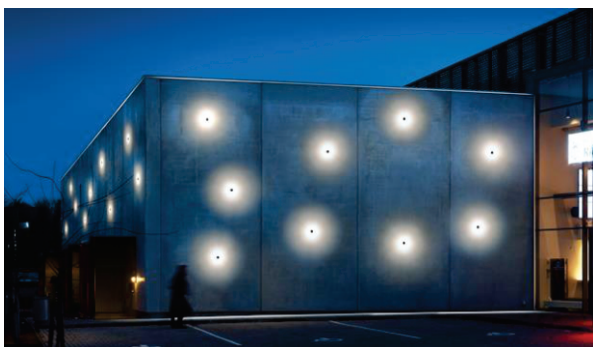

Mounting Options
Surface / Recessed



Perfect Edge Lit
upto 200mm



outdoor

Orilla

Surface mounted luminaire




ORILLA 360




ORILLA RECESSED

Product Information

- > Lamp Type
COB
- > Dimming Options
Not Available
- > Nominal Operating Voltage
24VDC
- > Control Type
On / Off
- > Median useful life
L70B10 30,000 Hours
- > Materials
Body: Die-Cast Aluminum +
Tempered Glass, Stainless Steel
- > Screws, Anodized Aluminum Reflector
- > Installation Type
Wall Mounted
- > Ingress protection
Code IP66
- > Mech. impact
Ik08
- > Power Factor
0.9+
- > Working Temperature
Ta : -15°C ~ +55°C
- > Protection Class
IEC Safety Class III
- > Finish
Polyester powder coat
with phospho-chromated
pre finish.



360



Recessed

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz
ORILLA 360	06	3000k.4000k.6500k	1180	360° x 13°
ORILLA RECESSED	06	R.G.B	1450	360° x 10°

outdoor

Orilla

Surface mounted luminaire




ORILLA 240




ORILLA S

Product Information

- > Lamp Type
COB
- > Dimming Options
Not Available
- > Nominal Operating Voltage
24VDC
- > Control Type
On / Off
- > Median useful life
L70B10 30,000 Hours
- > Materials
Body: Die-Cast Aluminum +
Tempered Glass, Stainless Steel
- > Screws, Anodized Aluminum Reflector
- > Installation Type
Wall Mounted
- > Ingress protection
Code IP66
- > Mech. impact
Ik08
- > Power Factor
0.9+
- > Working Temperature
Ta : -15°C ~ +55°C
- > Protection Class
IEC Safety Class I
- > Finish
Polyester powder coat
with phospho-chromated
pre finish.



W240



Orilla S

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz
ORILLA 240	06	3000k.4000k.6500k	630	240° x 13°
ORILLA S	08 15	R.G.B	1180 1450	360° x 10°


Ordering Guide Sample *Ejemplo de la guía de pedido*

MO-WATT-ITL-CT-VA-OA-OB


EXAMPLE : CURV 18 SM 30 BA01 OA02 OB01

MO	Model	WATT	ITL	Installation Type	CT	C.C.T	BA+	Lamp Type	OA+	Body Colour	OB+	Voltage
	Orilla 360	06	SM	Surface Mounted	27	2700K	01	360° x 13°	01	Graphite	01	220VAC
	Orilla Recessed	06	SR	Surface Recessed	30	3000K	02	360° x 10°	02	White	02	24VDC
	Orilla 240	06			40	4000K	03	240° x 13°				
	Orilla S	08			57	5700K	04	360° x 10°				
		15			0X	R,G,B						


Product Dimensions *Dimensión del producto*

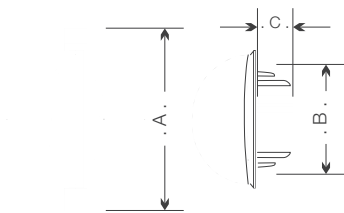


Recessed



Surface 360

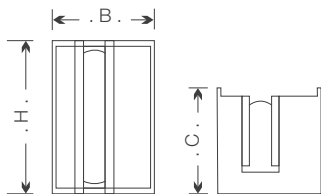

Orilla 240

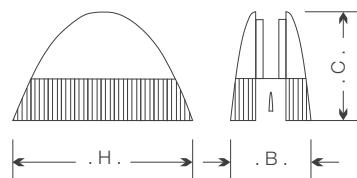

Orilla S

Model / Watt <i>modelo / power</i>	Diameter A <i>diametro</i>	Height L <i>altura</i>	Width B <i>anchura</i>	Depth C <i>fondo</i>	Cuthole <i>agugero</i>
Orilla 360	125mm	94mm	94mm	33mm	100mm
Orilla Recessed	110mm	-	-	52mm	-
Orilla 240	-	100mm	68mm	70mm	-
Orilla S	-	153mm	80mm	93mm	-

5 Years Warranty

As a globally leading luminaire manufacturer, AVADA Lighting provides a five-year warranty for its complete product range within all European Countries.

Avada Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.